

# NuBot Mechanical and Electrical Description 2016


Huimin Lu, Junhao Xiao, Zhiwen Zeng, Dan Xiong, Qinghua Yu  
Xianglin Yang, Wei Dai, Junkai Ren, Yuxi Huang, Qiu Cheng,  
Weijia Yao, Peng Chen, Sha Luo, Minjun Xiong, Zhiqiang Zheng

College of Mechatronics and Automation,  
National University of Defense Technology, China, 410073  
<http://nubot.trustie.net>  
[lmnew@nudt.edu.cn](mailto:lmnew@nudt.edu.cn), [junhao.xiao@ieee.org](mailto:junhao.xiao@ieee.org)

**Abstract.** The software structure, mechanical and electrical system of the robot from NuBot team is described in this material. The size of the current robot is  $50\text{cm} \times 50\text{cm}$ , and the weight is about 35 kg.

## 1 Mechanical


This section describes the mechanical design of our soccer robots. Currently the regular robot and the goalie robot are heterogenous due to their different tasks. The mechanical platform is composed of five main parts: the base frame, the ball handling mechanism, the electromagnet shooting system, the omnidirectional vision system and the front vision system, as illustrated in Fig. 1. For the goalie robot, the ball handling mechanism, the electromagnet shooting device and the front vision system are removed, instead two Kinect sensors are integrated as shown in Fig. 1.

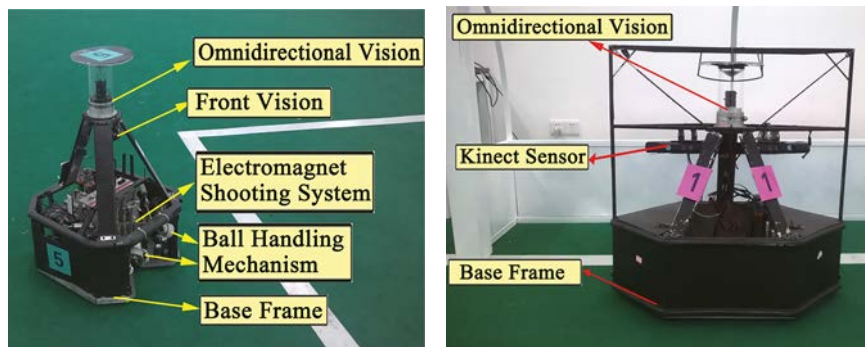

**Fig. 1.** The NuBot regular robot (left) and the goalie robot (right).

## 1.1 Base frame


In our omnidirectional wheeled platform, we use custom-designed omnidirectional wheel, which is illustrated in Fig. 2(left). Four such omnidirectional wheels are uniformly arranged on the base as shown in Fig. 2(right).

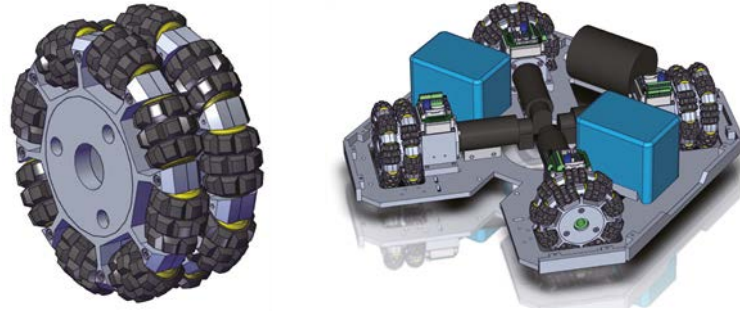

**Fig. 2.** The omnidirectional wheel and the base frame of the NuBot soccer robot.

## 1.2 The Active Ball Handling System


The active ball handling system, which is designed for dribbling the ball, is made up of the active ball handling mechanism and its close-loop control system. As illustrated in Fig. 3, there are two symmetrical assemblies, and each contains a wheel, a DC motor, a set of transmission bevel-gear, a linear displacement transducer and a support mechanism. The wheels are driven by the DC motor and are always pressed by the ball, therefore they can generate various friction force to the ball, making it rotate in desired directions and speeds together with the soccer robot. During dribbling, the robot will constantly adjust the speed of the wheels to maintain a proper distance between the ball and the robot using a closed-loop control system. This control system takes the actual ball distance as the feedback signal, which is measured indirectly by the linear displacement transducers attached to the supporting mechanism. As the ball moves closer to the robot, the supporting mechanism will raise, and then compress the transducer; otherwise, the support mechanism will fall and stretch the transducer. The information obtained from two transducers can be used to calculate the actual ball distance based on a given detailed geometry model and careful calibrations.

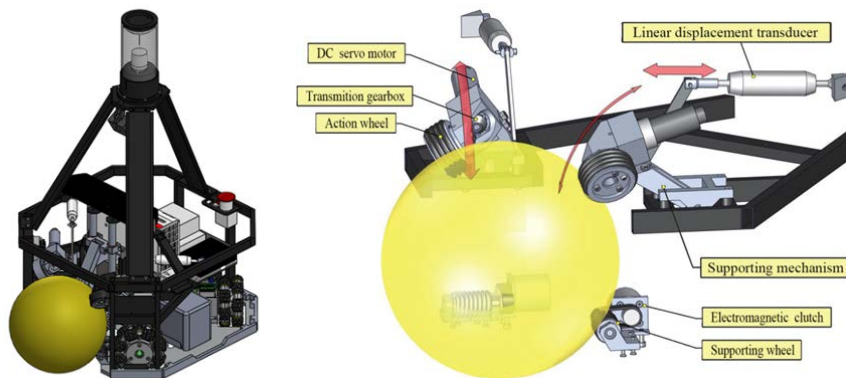

**Fig. 3.** Our active ball handling system.

### 1.3 The Electromagnet shooting system

The shooting system is basically a custom-designed electromagnet with a high impulsive force. As depicted in Fig. 4, it consists of a solenoid, an electromagnet core, a shooting rod, a capacitor, and two linear actuators with potentiometer. The shooting rod can be adjusted in height to allow for different shooting modes, namely at shoots for passing and lob shoots for scoring. Two modes are realized using two linear actuators to move the hinge of the shooting rod to different positions. Initially, the electromagnet core is rearward located within the solenoid and the capacitor is charged. When the shooting action is activated, the rod will be adjusted according to the currently selected mode. Then the control circuit board will switch on the solenoid by discharging the capacitor, thus produce a strong electromagnetic force to push forward the rod. The rod then strikes the ball and delivers momentum to it. After the shooting is finished, the core will be pulled back to its initial position by an elastic stripe and the capacitor will be recharged again and wait for the next shooting action. Therefore, this system is simple yet capable of various shooting angles.

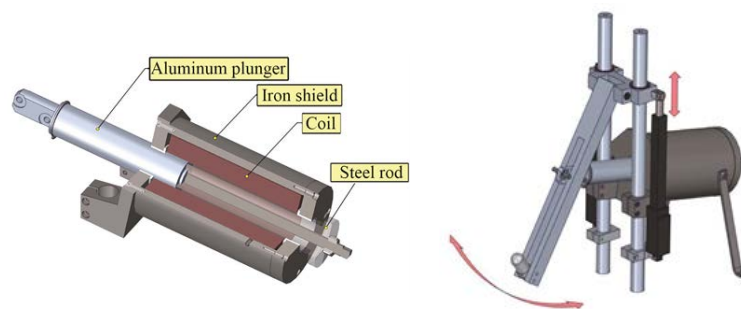

**Fig. 4.** The electromagnet shooting system of the NuBot soccer robot. Left: The Electromagnet; right: The Shooting System.

## 2 Industrial electrical system

The schematic diagram of the NuBot control system is shown in Fig. 5. All vision and control algorithms are processed on the industrial PC. The industrial PC communicates with the EtherCAT system via Ethernet. The Elmo Motion Control (SOL-WHI 20/60) is the intelligent miniature digital servo drive for the 150W DC brushless motor. The CANopen modular EL751 embedded in the EtherCAT is used to realize communication between the industrial PC and the Elmo Motion Controls. Our shooting module, also named as kicker driver, is mainly composed of a relay and an IGBT FGA25N120ANTD. The PC can send control signals to the kicker driver for shooting or passing via the EtherCAT.


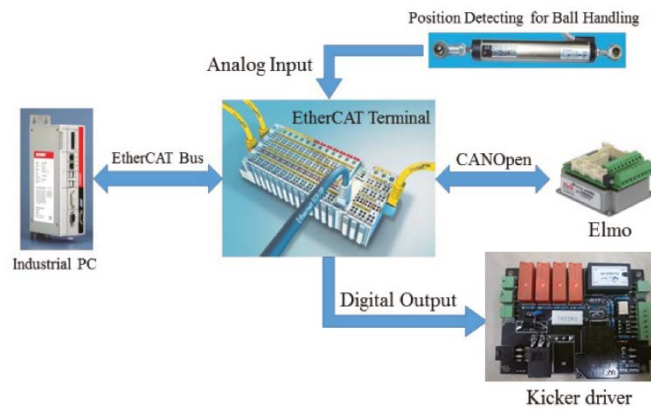


Fig. 5. The NuBot electrical system.

## 3 Software based on ROS

We have built our software based on ROS for our new robots. The operating system is Ubuntu 12.04, and the version of ROS is groovy. The software framework, as shown in Fig. 6, is divided into 5 main parts: the Prosilica Camera node and the OmniVision node; the UVC Camera node, the FrontVision node and the Kinect node; the NuBot Control node; the NuBot HWControl node; the RTDB and the WorldModel node. Two Kinect nodes replace the FrontVision node and the UVC Camera node for the goalie.

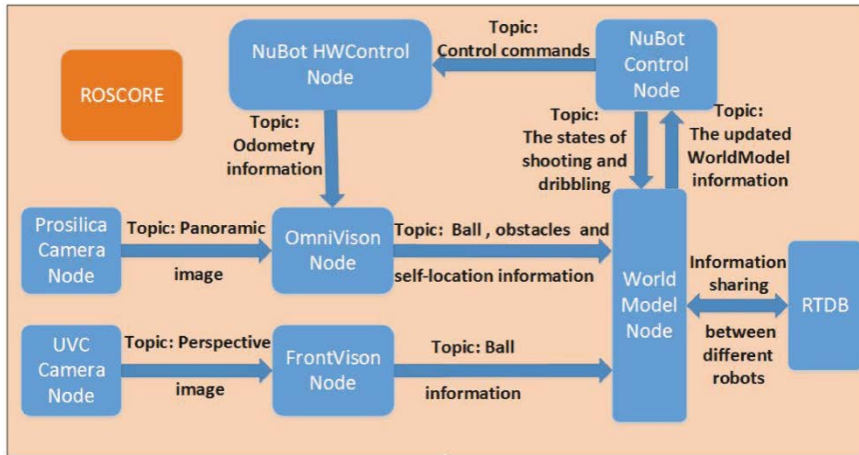

**Fig. 6.** The software framework based on ROS.